

PRODUCT DATA SHEET

Tolomeo Mini Table LED 3000K



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina
2010

MATERIALS:

aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light flow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminium; joints and supports in polished aluminium. System of spring balancing. 5 direct Led. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two independent lamp units to be fitted.

SELECT

LED

Base

Aluminium

PRODUCT CODE

A005600

Light emission

IP20



TECHNICAL DATA SHEET


FEATURES

Product name:	Tolomeo Mini Table LED 3000K
Article Code:	A005600
Colour:	Aluminium
Material:	aluminium, steel
Series:	Design

DIMENSIONS

Length:	cm 68
Height:	cm 54
Base Diameter:	cm 20
Max Extension Height:	cm 108
Max Extension Length:	cm 102
Impact Resistance:	N/D
Glow Wire Test:	N/D °

DIMENSIONS



COLOUR



LAMPS INCLUDED

Category:	LED COB
Number:	1
Watt:	10W
Color temperature (K):	3000 K
Class:	A

LUMINAIR

Watt:	10W
Voltage:	24V
Luminous Flux (lm):	593lm
CCT:	3000K
Efficiency:	70%
Efficacy:	59lm/W
CRI:	90
Dimmer Typology:	Microswitch Dimmer

ACCESSORIES



TOLOMEO SUPP.TAVOLO
FISSO A004200




TOLOMEO MORSETTO
A004100



TOLOMEO BASE D 200 ALL
A008600

DIAGRAMS

Polar curve

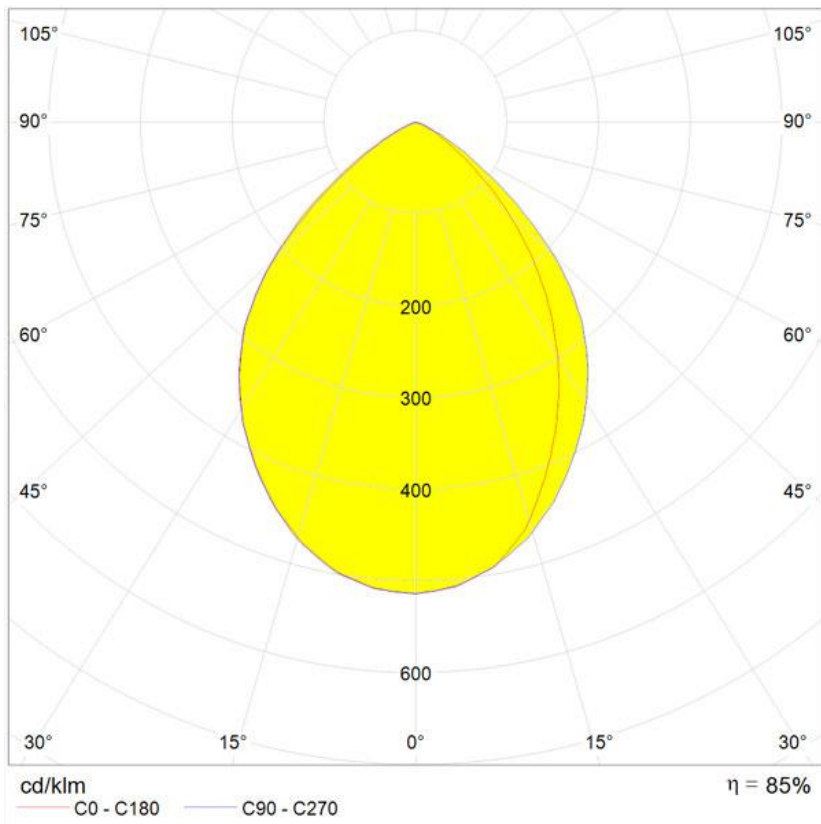

Cartesian diagram

