

Piazza II LED

THORN

9666259 PIAZZA II LED 1690-840 HF P ANT

LED	15W TL_PIA2	IP65	IK10						
T _a -20 +40									


Piazza II LED

A robust Wall mounted luminaire. Electronic, fixed output control gear. Back plate: Die-cast aluminium, painted anthracite. Body: anthracite polycarbonate. Ø20mm cable entry via rear or side conduit entries, BESA compatible. IP65, IK10. Complete with 4000K LED. Equipped with Mini Photocell.


Dimensions: 381 x 196 x 305 mm
Luminaire input power: 15.4 W
Luminaire luminous flux: 1844 lm
Luminaire efficacy: 120 lm/W
Weight: 2.8 kg



TLG_PIA2_F_PDB.jpg

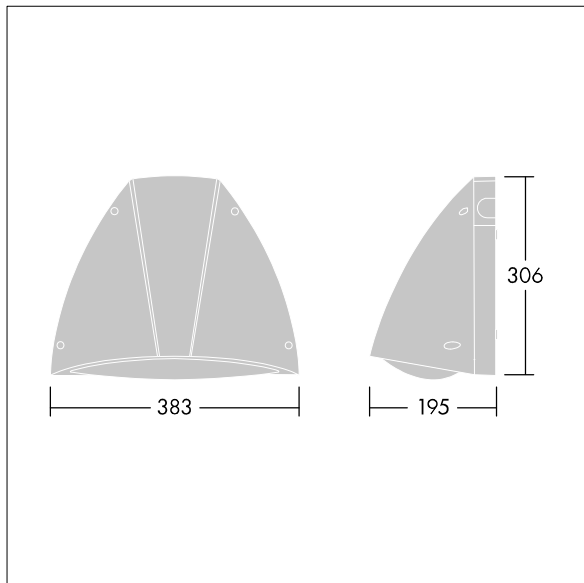

TLG_PIA2_M_LD1.wmf

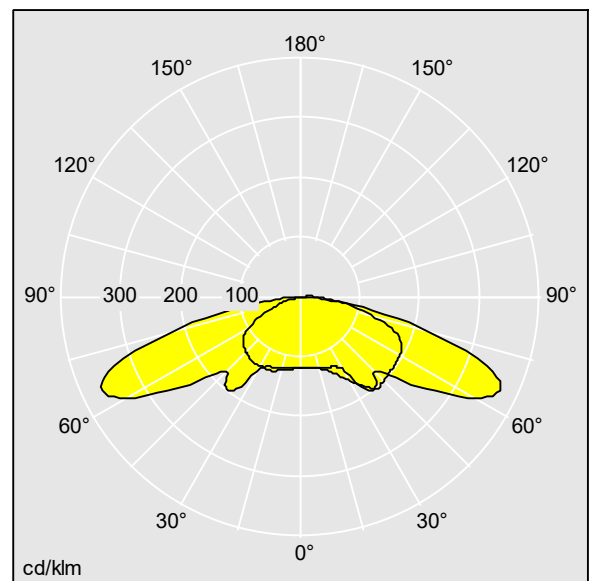

TLTP_PIA2_1690.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1844 lm
Luminaire efficacy*: 120 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 87500630 PIAZZA II LED 1690-840 HF ANT

Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam): 5
Rated median useful life*:
L70 60000 h at 25 °C
Luminaire input power*: 15.4 W
Dimming: FO
LOR: 1,00 ULOR: 0,02 DLOR: 0,98

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting