


Outdoor | Ground recessed luminaires | Metamorphosi Evo



**CUT
OUT**

121mm

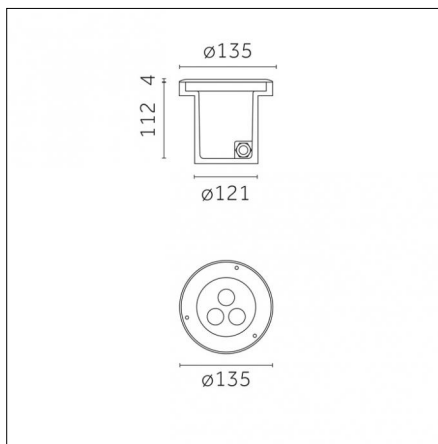

Medium 30°



IP67 IK09



Risk 1

850°



NO



Code 0.FL91E.WW00

Light source features

Number of light sources: 1

Source type: LED WW

Watt: 3W

Lm: 420lm

Lm/W: 140lm/W

Kelvin/CRI: 3000K / >80

SDCM/L70 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 30°

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Fixing: Ground

Finishing: Without finish / Stainles Steel / Natural aluminium

Weight: 0.25Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.30381.0000 - IP68 accessory for cascade connection

Type: Electrical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
