

Beta 3

96634493 BETA 3 3200-840 HFIX LRO Q600


LED 26W BET3_LO-840	IEC EN 60598-1 RG 0	↓IP20 ↑IP44	IK03					650°C	T _a -20 +40	
----------------------------	------------------------	----------------	------	--	--	--	--	-------	---------------------------	--

Beta 3


A square ceiling recessed LED luminaire. DALI dimmable LED driver. Class II electrical, IP44_IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m² as per EN 12464:2011


Dimensions: 596 x 596 x 34 mm
Luminaire input power: 26 W
Luminaire luminous flux: 3200 lm
Luminaire efficacy: 123 lm/W
Weight: 2.11 kg

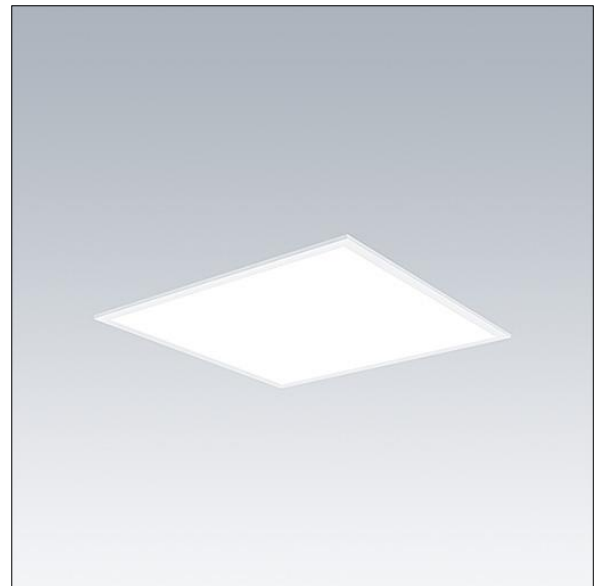

TLG_BET3_F_MREQ.jpg

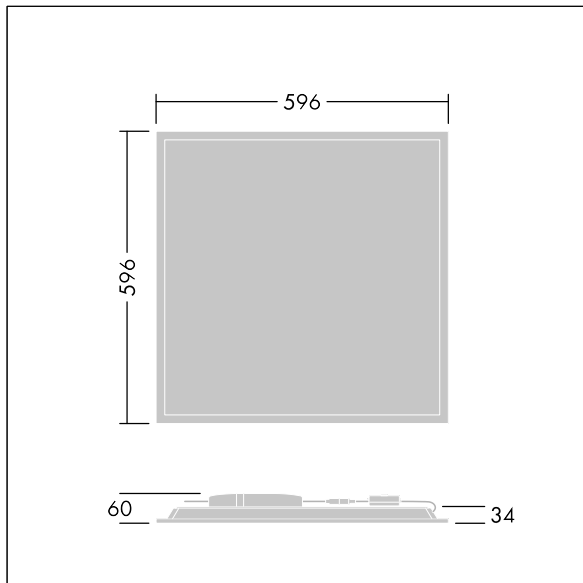

TLG_BET3_M_Q600.wmf

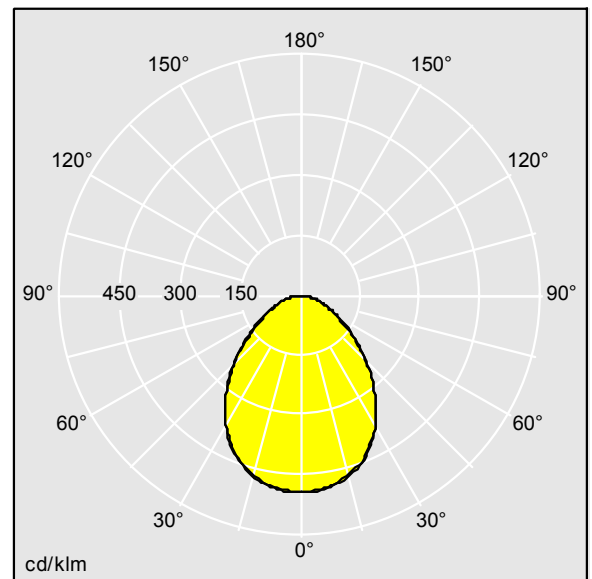

BETAIII596LO4000K.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 3200 lm
Luminaire efficacy*: 123 lm/W
Lamp efficacy: 123 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000672 LCA 45W 500-1400mA one4all
SR PRE
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Correlated colour temperature: 4000 Kelvin
Chromaticity tolerance (initial MacAdam): 4
Rated median useful life*:
L80 50000h at 25°C
Luminaire input power*: 26 W Power factor = 0.98
Standby Power*: 0.15 W
Dimming: DaliDim
Maintenance category: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG1) with regard photobiological blue light safety (IEC/EN60598-1).