


Batten for LED Lightline


Batten for LED Lightline; Colour rendering Ra > 80, colour temperature 3000 K. Luminaire wired with halogen-free leads. Dimensions: 993 x 38 x 51 mm weight: 0.8 kg. SLOIN slim consists of a channel, LED-batten, cover and accessories, which have to be configured and ordered separately. This product is one part of the complete configuration.

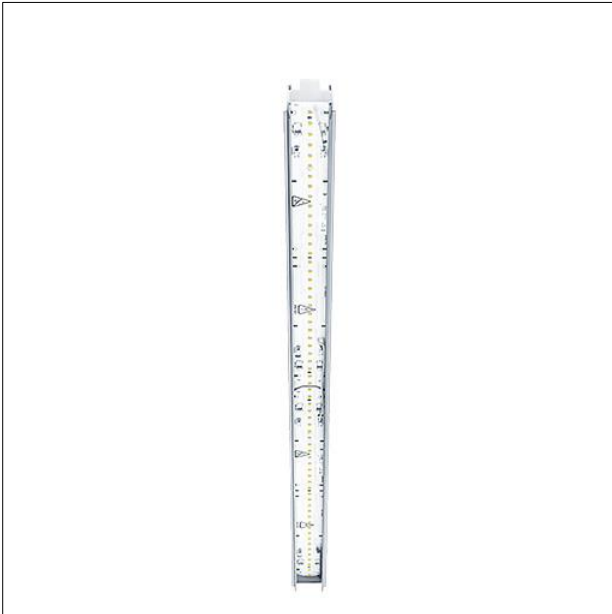

ZS_SLI_F_slim_Balken.jpg

Light Distribution

830 PC - 3000 K - diffuse

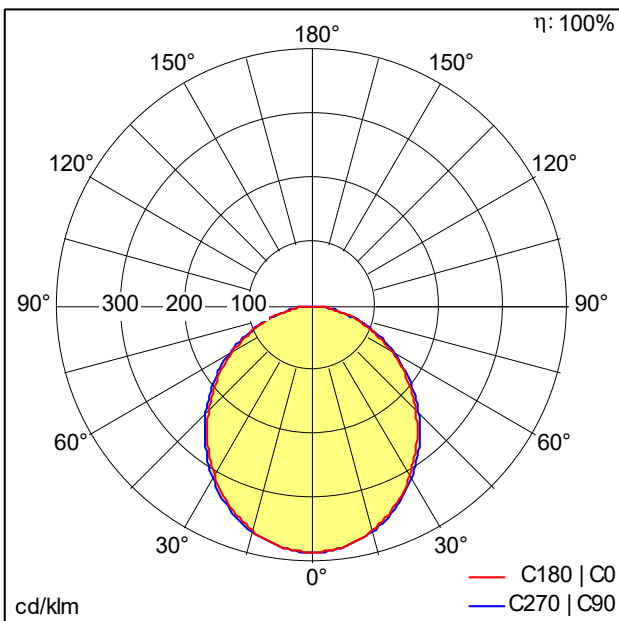

- Ballast: 1 x 28000654 LCA 35W 150-700mA one4all Ip PRE
- Luminaire input power*: 18.9 W Power factor = 0.9
- Standby Power*: 0.15 W
- Dimming: LDE dimmable to 1% over DALI, DSI and switchDIM DC level is adjustable
- Maintenance category CIE 97: A - Barelamp Batten
- Total harmonic distortion (THD): 17.10 %

This product contains a light source of energy efficiency class B.

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Luminaire luminous flux possible up to 1900 lumens per running metre