

Equaline Mini

96630767 EQUAMINI L1180 LED1900-830

THORN

| | | | | | | | | | | |
|--------------------------|------|------|--|----|--|-----|--|--|------|--|
| LED 18W LED_EQUM_2080_HF | IP20 | IK06 | | CE | | ERC | | | Ta35 | |
|--------------------------|------|------|--|----|--|-----|--|--|------|--|


Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, fixed output control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via flap in rear of body. Continuous linking possible. Complete with 3000K LED


Dimensions: 1180 x 37 x 60 mm
Luminaire input power: 17.8 W
Luminaire luminous flux: 2045 lm
Luminaire efficacy: 115 lm/W
Weight: 1.05 kg



TLG_EQUM_F_LT.jpg

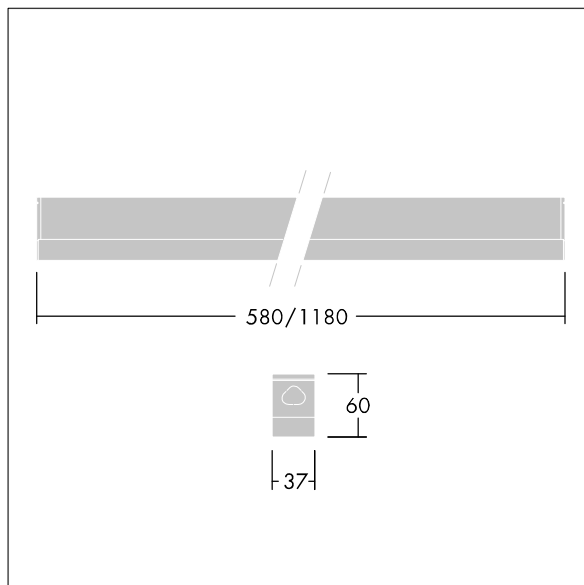

TLG_EQUM_M_LD1.wmf

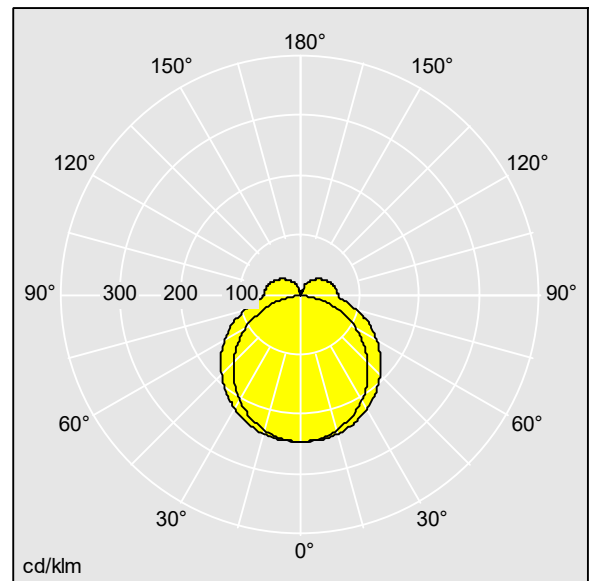

TLTP_EQUM_L1180_LED1900_830.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 2045 lm
Luminaire efficacy*: 115 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28002472 EQUAMINI L580 LED950-830
LOR: 0,98 ULOR: 0,16 DLOR: 0,82

Correlated colour temperature*: 3000 Kelvin
Chromaticity tolerance (initial MacAdam): 4
Rated median useful life*:
L70 50000 h at 25 °C
Luminaire input power*: 17.8 W
Dimming: FO
Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group