

PRODUCT DATASHEET

DL IP44 DN 115 8W 865 WT

DOWNLIGHT IP44 | Downlights with IP44 grade



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- General illumination
- Public areas
- Stairways
- Corridors
- Shops
- Bathrooms

Product benefits

- High luminous efficacy
- Very homogenous light
- Simple installation thanks to integrated driver

Product features

- Type of protection: IP44
- Luminous efficacy: 100 lm/W




TECHNICAL DATA**Electrical data**


Nominal wattage	8.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	60.000 mA
Inrush current	6.5 A
Inrush current time T_{h50}	250 μ s
Max. no. of lum. on circuit break. B16 A	186
Max. no. of lum. on circuit break. C10 A	100
Max. no. of lum. on circuit break. C16 A	160
Power factor λ	0.50
Total harmonic distortion	< 80 %
Protection class	II
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	800 lm
Luminous efficacy	100 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdc _m
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	100 °

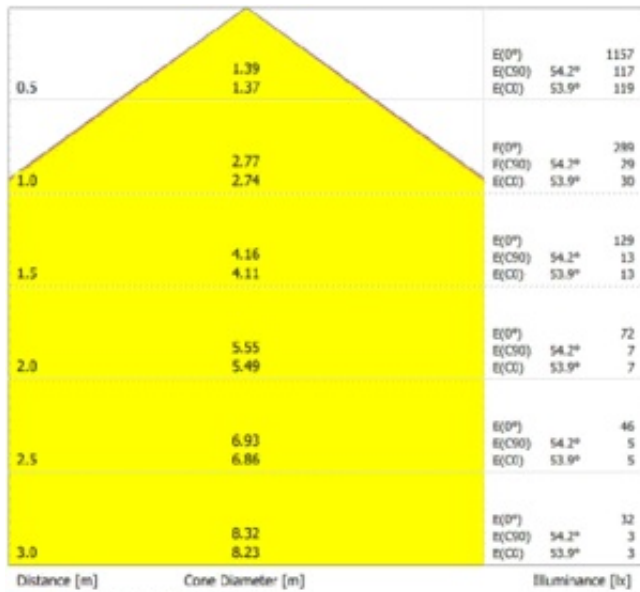


LDC typ cone

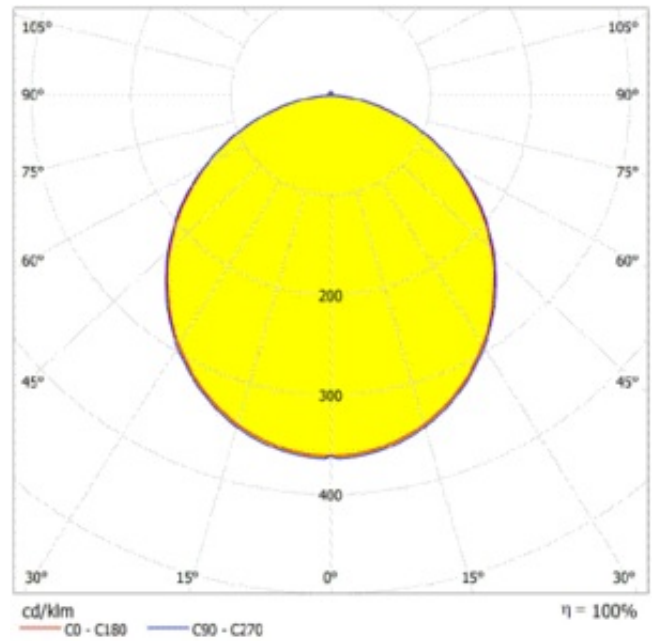

LDC typ polar

Dimensions & Weight

Diameter	115.00 mm
Height	42.00 mm
Product weight	70.00 g

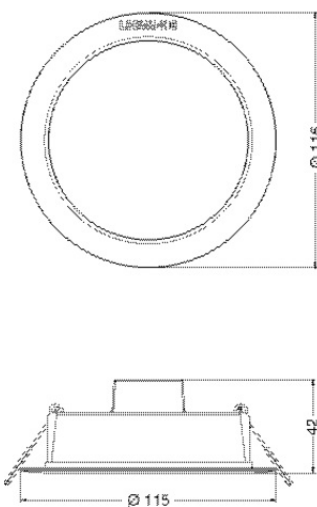

Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Cable, 2-pole
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	100 mm
Mounting depth	40 mm
Adjustable	No
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	20000 h
Lifespan L80/B10 at 25 °C	18000 h
Lifespan L90/B10 at 25 °C	15000 h
Number of switching cycles	100000

Control gear

Output current	60 mA
ECG - Output ripple current	< 5 %













Certificates & Standards

Standards	CE / EMC / ROHS 2.0 / REACH
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

EQUIPMENT / ACCESSORIES

- Surface mounting frames available as accessories

DOWNLOAD DATA


DOWNLOAD DATA	
	User instruction
	Addon Technical Information
	Tender documents
	Declarations Of Conformity CE
	IES file (IES)
	LDT file (Eulumdat)
	R3D file (Relux 3D Model)
	ROLF file (RELUX)
	M3D file (3D Model)
	ULD file (DIALux)
	UGR file (UGR table)
	Packaging insert

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075703025	Folding box 1	120 mm x 51 mm x 120 mm	97.00 g	0.73 dm ³
4058075703032	Shipping box 10	269 mm x 250 mm x 136 mm	1174.00 g	9.15 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

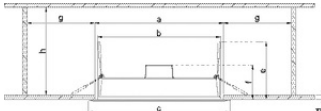

Model	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	h [mm]	i [mm]	j [mm]	k [mm]	l [mm]	m [mm]	n [mm]	o [mm]	p [mm]	q [mm]	r [mm]	s [mm]	t [mm]	u [mm]	v [mm]	w [mm]	x [mm]	y [mm]	z [mm]	
DL IP44 DN100	120	51	120	120	51	120	51	120	51	120	51	120	51	120	51	120	51	120	51	120	51	120	51	120	51	120	51
DL IP44 DN116	130	55	130	130	55	130	55	130	55	130	55	130	55	130	55	130	55	130	55	130	55	130	55	130	55	130	55
DL IP44 DN160	160	60	160	160	60	160	60	160	60	160	60	160	60	160	60	160	60	160	60	160	60	160	60	160	60	160	60
DL IP44 DN190	190	65	190	190	65	190	65	190	65	190	65	190	65	190	65	190	65	190	65	190	65	190	65	190	65	190	65
DL IP44 DN216	216	70	216	216	70	216	70	216	70	216	70	216	70	216	70	216	70	216	70	216	70	216	70	216	70	216	70

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.