



Datasheet

PROLED PICCOLO 45

PROLED[®]

Article number: L710P436W
Article name: PROLED PICCOLO 45
Article description: PROLED PICCOLO 45 SWW WHITE
GTIN: 4251158447957



picture similar

Article description:

The **PROLED DOWNLIGHTS** have been designed and developed for ceiling installation. Different requirements of yours Project require different lighting solutions. Due to the variety of **PROLED DOWNLIGHTS**, your solution stands for room architecture nothing in the way. The downlights can also be easily used with special constant current dimmers or constant current drivers be dimmed.

Photometrical properties:

Light flux:	450 lm
Color appearance:	super warm white
CCT:	2700 K
CRI:	90
Beam angle:	30 °

Date: 3.9.2024

Technical amendments and errors reserved.

PROLED[®]


MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

Electrical properties:

Voltage supply:	350 mA CC ; 17 VDC
Electrical safety class:	III
Power consumption:	6 W
Luminaire luminous efficacy:	75 lm/W
EEC (EU 2019/2015):	
Control:	with separate controller

Technical properties:

Connection:	cable to open wires; 2-Pin
IP safety class:	IP20
Adjustable:	not adjustable
Cover:	Clear
Reflector surface:	without

Housing and size:


Size:	51 x 64 mm (d x h)
Housing colour:	white
Shape:	round
Housing material:	alu
Housing surface:	matt
Product weight:	0,110 kg

Mounting instructions:

For outdoor use:	–
Mounting place:	Wall-ceiling installation
Mounting type:	clampable
Installation dimensions:	41 x 64 mm (d x t)
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.


Spectral distribution:

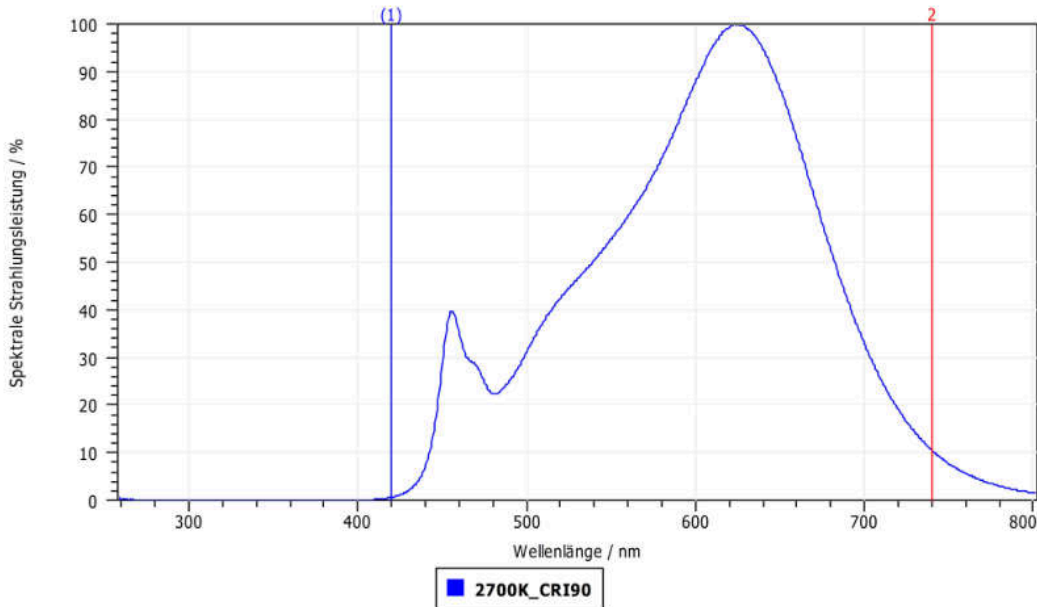

Flags:



Detail and realisation pictures:



Information on the Ecodesign Directive:

This product counts as „containing product“ according to directive (EU) 2019/2020 and (EU) 2019/2015. The light source is part of the containing product. A separation of the light source and the containing product using commonly available tools is possible with this product. Replacement of the light source and the separate control gear using commonly available tools is possible with this product. Installation and

commissioning may only be performed by qualified persons. National installation regulations must be observed.

Luminaire must be disconnected from mains before any work.

