


Date
Customer
Project
Type

Wink Asy Recessed 82 1x IP54 Spreadlight LED 2700K Wide Flood DE White Structure

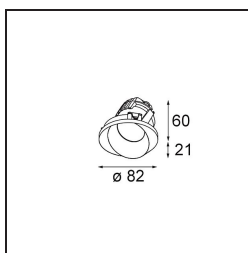

Specifications

Material	14202009
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	59 92 99 100 78
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	54
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø98
Mounting depth (mm)	100.0
Adjustability	H 355°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	288.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13.2 13.7
Max. forward voltage (Vf)	15.0 15.4
Connected load (W)	5.0 7.2
Luminous flux per lamp (lm)	432 580
Efficacy (lm/W)	86 81
Glare rating	30 31
Remark	<ul style="list-style-type: none"> • This is not a complete product. Recessed Ring or Wink Flange required.


Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.




MODULAR
LIGHTING —
INSTRUMENTS

*Wink Asy Recessed 82 1x IP54 Spreadlight LED 2700K Wide
Flood DE White Structure*


TM30 & CRI diagram

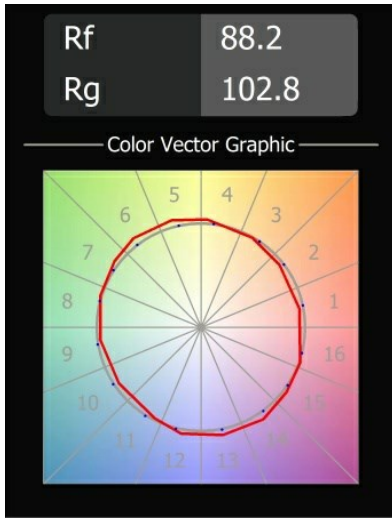


Light distribution & beam diagram

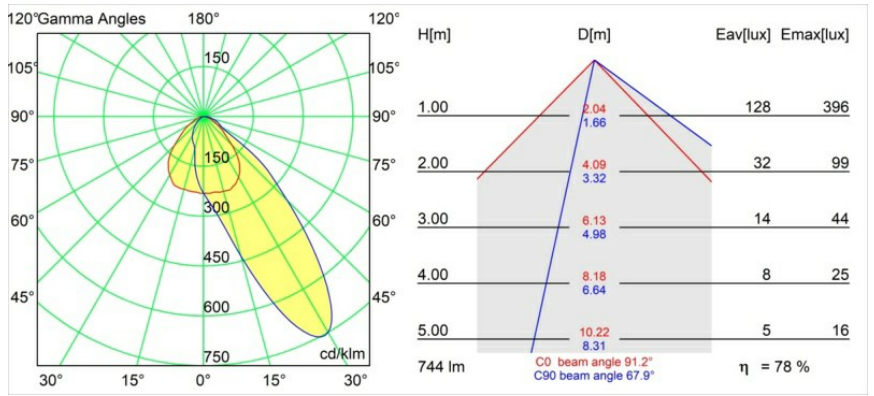

Installation Accessories

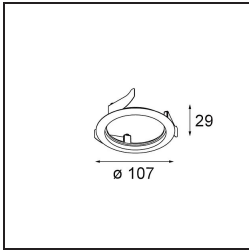

- **14203009** Ring Recessed 82 Wink White Structure
- **14203032** Ring Recessed 82 Wink 1x Black Structure

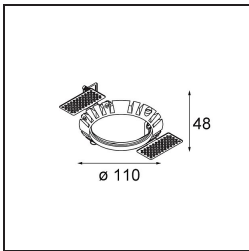

- **14203030** Ring Recessed Trimless 110 1x

■ Choose a required accessory