


Article number: L15W263
Article name: PROLED FLEX STRIP WALL
Article description: PROLED Flex Strip Wall w, SWW, 30°
GTIN: 4251158457345

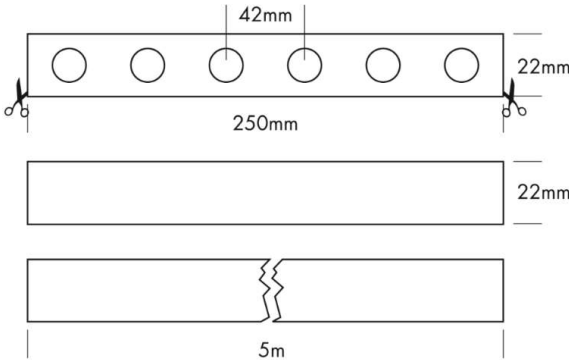

picture similar

Article description:

The idea: to present structures and walls in the best light with little effort. Horizontal, vertical, sculptural. The compact solution with incredible potential: FLEX STRIP WALL.

- For grazing light with incredible range
- For all vertical surfaces in interior and exterior architecture
- Ideal for staging vertical structures, perfectly emphasising their three-dimensionality
- Dimmable to 20% with suitable PWM dimmers

Photometrical properties:

Light flux:	1900 lm/m
Color appearance:	super warm white
CCT:	2700 K
CRI:	90
Beam angle:	30 °

Electrical properties:

Voltage supply:	24 VDC
Electrical safety class:	III
Power consumption per m:	18 W/m
Power consumption:	90 W
max. power consumption per reel	90 W
Luminaire luminous efficacy:	106 lm/W
EEC (EU 2019/2015):	

Technical properties:

Connection:	2x Cable with plug female; 2 x 0.5 mm ² ; 20 cm
IP safety class:	IP65 (for outdoor use)*
Adjustable:	not adjustable
Min. bending radius:	100 mm

* Supply connector/end caps IP65 only if glued correctly.

Housing and size:


Size:	5000 x 22 x 22 mm (l x w x h)
Housing colour:	white
Cutting length:	250 mm
Product weight:	2,000 kg

Mounting instructions:

For outdoor use:	✓
Self adhesive:	–
Mounting place:	Wall-ceiling mounting
Mounting type:	Fastening with clips
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.

Spectral distribution:

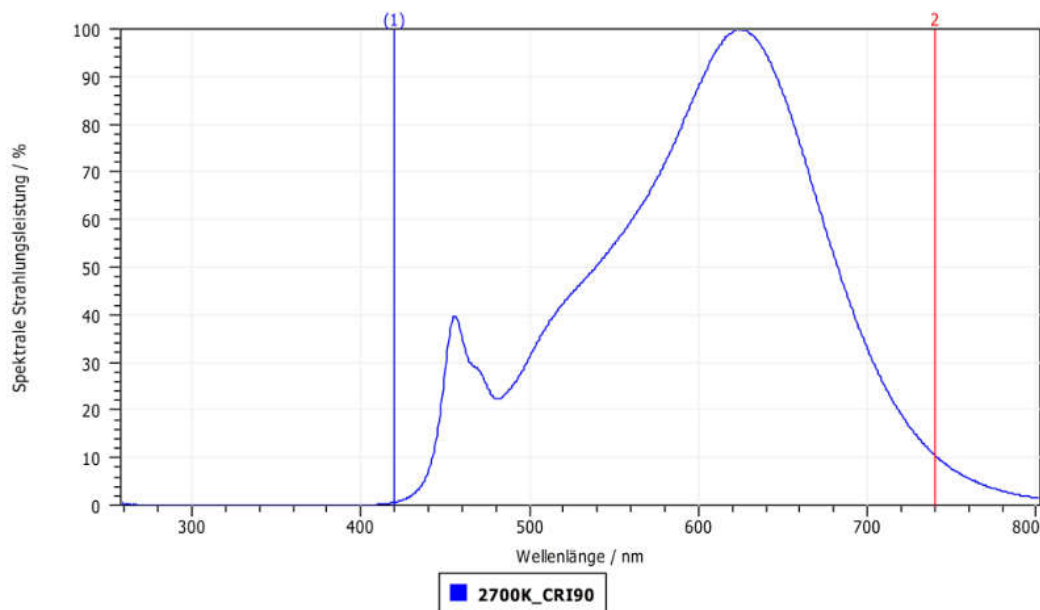

Flags:

