


Article number: L5202410LM  
Article name: PROLED SNAKE CV  
Article description: PROLED SWITCHING POWER SUPPLY SNAKE CV 24-100  
GTIN: 4251158441788

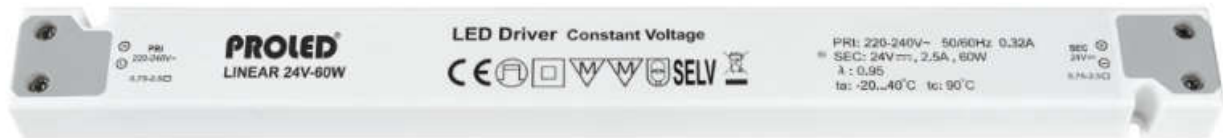

picture similar

### Electrical properties:

Input:	
Voltage supply:	220 - 240 VAC ; 50 - 60 Hz ; 0.55 A
Inrush current:	< 50 A ; < 300 μs
Efficacy:	92 %
Power factor:	0,95
Output:	
Output:	24 VDC; 4.17 A; 100 W
Output adjustable:	–

### Technical properties:

Primary connection:	Screw terminal; 0.75 - 2.5 mm <sup>2</sup>
Secondary connection:	Screw terminal; 0.75 - 2.5 mm <sup>2</sup>
Control:	no
PWM dimmer:	–
Fan:	without fan

### Protection properties:

Protections:	Short cut, Over power, Over temperature, Open circuit
Electrical safety class:	II
IP classification:	IP20
MM sign:	✓

Date: 2.9.2024

Technical amendments and errors reserved.

#### PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

**Connection to Fuses:**

Fuse type:	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20
Number units:	3	4	5	7	8	7	9	11	14	18	14	19	21	29

**Housing and size:**

Size:	312 x 30 x 18 mm (l x w x h)
Housing colour:	white
Housing material:	Plastics
Product weight:	0,160 kg

**Mounting instructions:**

For outdoor use:	–
Mounting place:	Stand mounting, Wall-ceiling mounting
Mounting type:	screwable
Ambient temperature:	-20 °C to 45 °C
Max. case temperature:	90 °C

**Flags:**

