


Article number: L5202475
 Article name: PROLED PUMA CV
 Article description: PROLED SWITCHING POWER SUPPLY PUMA CV 24-075
 GTIN: 4251158408316

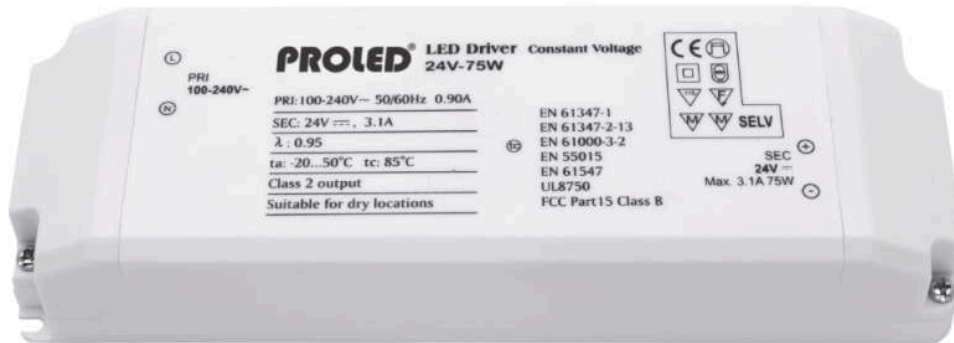

picture similar

Electrical properties:

Input:	
Voltage supply:	220 - 240 VAC ; 50 - 60 Hz ; 0.45 A
Inrush current:	< 30 A ; < 300 μs
Efficacy:	89 %
Power factor:	0,95
Output:	
Output:	24 VDC; 3.1 A; 75 W
Output adjustable:	—

Technical properties:

Primary connection:	Screw terminal; 0.75 - 2.5 mm ²
Secondary connection:	Screw terminal; 0.75 - 2.5 mm ²
Control:	no
PWM dimmer:	—
Fan:	without fan

Protection properties:

Protections:	Short cut, Over power, Over temperature, Open circuit
Electrical safety class:	II
IP classification:	IP20
MM sign:	✓

Connection to Fuses:

Fuse type:	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20
Number units:	5	7	9	11	14	12	16	19	24	30	24	32	36	49

Housing and size:

Size:	184 x 61 x 32 mm (l x w x h)
Housing colour:	white
Housing material:	Plastics
Product weight:	0,260 kg

Mounting instructions:

For outdoor use:	–
Mounting place:	Stand mounting, Wall-ceiling mounting
Mounting type:	screwable
Ambient temperature:	-20 °C to 45 °C
Max. case temperature:	85 °C

Flags:

