

Datasheet


PROLED BAR SLIMLINE MONO IP65

PROLED[®]

Article number: L1456UR
Article name: PROLED BAR SLIMLINE MONO IP65
Article description: PROLED BAR SLIMLINE WW AG 50cm
GTIN: 4251158422138



picture similar

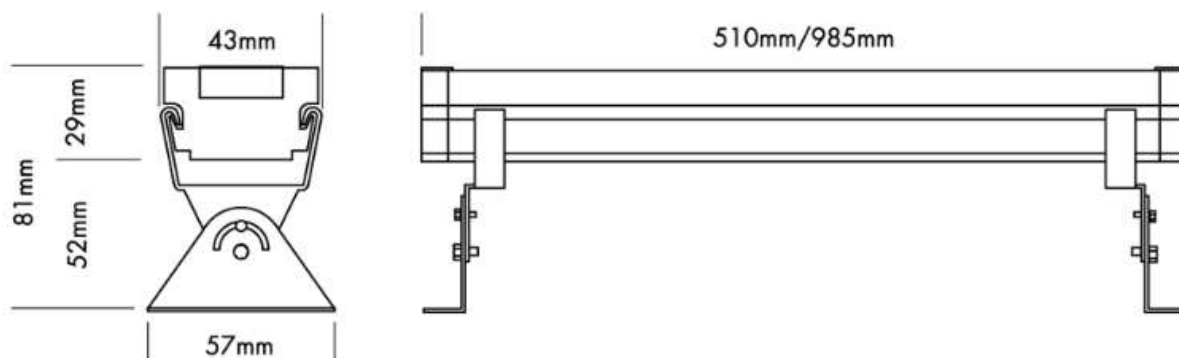

Article description:

The PROLED SLIMLINE MONO BARS IP65 are ideal for the illumination of large surfaces, e.g. buildings, walls or signboards in outdoor areas. They are equipped with high power LEDs (1 Watt).

- dimmable and controllable with suitable PWM dimmers or MULTI power supplies/controllers

Date: 16.8.2024

Technical amendments and errors reserved.

PROLED[®]

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99


Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

Photometrical properties:

Light flux:	950 lm
Color appearance:	warm white
CCT:	3000 K
CRI:	80
Beam angle:	25 °

Electrical properties:

Voltage supply:	24 VDC
Electrical safety class:	III
Power consumption:	14 W
Luminaire luminous efficacy:	68 lm/W
EEC (EU 2019/2015):	
Control:	with separate controller

Technical properties:

Connection:	1x Cable with IP68 plug male; 2 x 1 mm ² ; 40 cm 1x Cable with IP68 plug female; 2 x 1 mm ² ; 40 cm
IP safety class:	IP65 (for outdoor use)
Adjustable:	swivelling
Reflector surface:	without

Housing and size:


Size:	500 x 43 x 110 mm (l x w x h)
Housing colour:	grey
Housing material:	alu
Housing surface:	matt
Product weight:	1,300 kg

Mounting instructions:


For outdoor use:	✓
Mounting place:	Stand mounting, Wall-ceiling mounting, Floor installation
Mounting type:	screwable
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L80/B10

** With correct installation and suitable thermal management.

Spectral distribution:

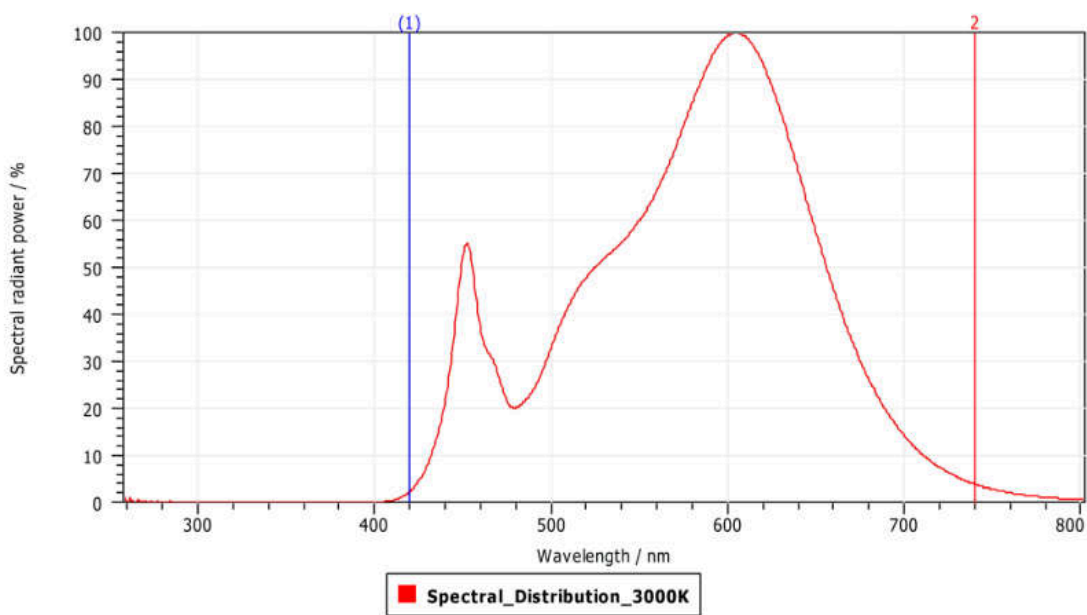

Flags:



Datasheet

PROLED BAR SLIMLINE MONO IP65

PROLED®

Detail and realisation pictures:



Date: 16.8.2024

Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen