


Pendant LED luminaire

Pendant LED luminaire (round) with variable luminaire body for architectural structures (e.g. arches, waves); luminaire ultra-flat with integrated converter; modular LED luminaire concept; cover of polymethylmethacrylate (PMMA), opal with symmetric Lambertian light distribution; lamp(s): 1/26W LED1600-940; Colour rendering Ra > 90, colour temperature 4000 K (neutral white); Chromaticity tolerance (initial MacAdam): 3; Luminaire luminous flux: 1500 lm, Luminaire efficacy: 58 lm/W; service life: 50000 h for luminous flux at 80%; control gear: LED converter switchable luminaire; luminaire unit can be rotated through 355° and tilted through ±30°; luminaire consists of housing, cover and trim; housing of die-cast aluminium, silver matt painted; trim in polycarbonate, white; Suspension consists of pre-assembled cable (2000 mm) and included white ceiling rose (pendant tube must be ordered separately); electrical connection: 5-pole connector terminal, through-wiring is not possible; Luminaire input power: 26 W; mains voltage: 220-240V/ 50/60Hz; class of protection I; IP20; Dimensions: Ø334 x 74 mm; weight: 3.2 kg
Note: please order pendant tube separately. Can be cut to length on-site.




ZS_CAE_F_R330_Pendel_SIM.jpg

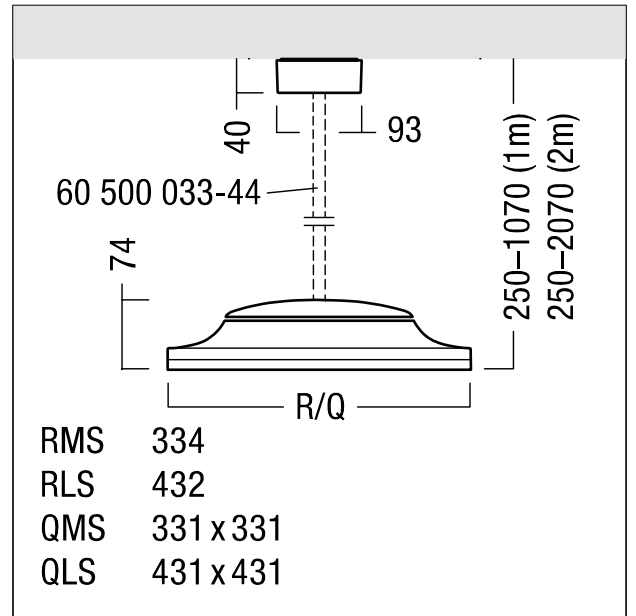

ZS_CAE_M_Pendel.wmf

Light Distribution

STD - standard

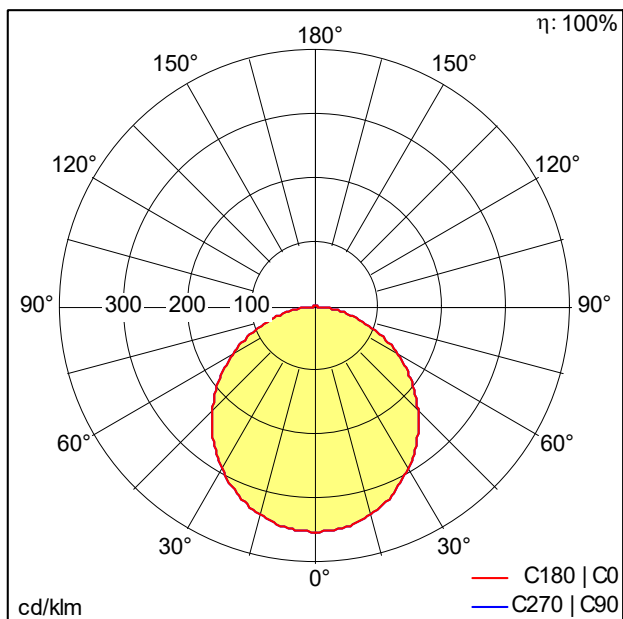

ST9247_N3.idt

- Light Source: LED
- Luminaire luminous flux*: 1500 lm
- Luminaire efficacy*: 58 lm/W
- Colour Rendering Index min.: 90
- Ballast: 1 x 00155281 DRV TC MP 55W 1.75A 44V F#C UNI
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*: L80 50000 h at 25 °C
- Luminaire input power*: 26 W Power factor = 0.93
- Dimming: SWI
- Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.