

# D-CO Bollard

# THORN

## 96262101 D-CO LED BOLLARD 700 30L50 830 CL1

LED 14W LED_507	ISO 9223 C3	IP65	IK10	⊕	CE	RoHS	EAC	UL	CCC	T <sub>a</sub> 50	
-----------------	----------------	------	------	---	----	------	-----	----	-----	-------------------	--


### D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED


Dimensions: Ø150 x 700 mm  
Luminaire input power: 14 W  
Weight: 4.15 kg



TLG\_DCOL\_F\_LEDBOLLARDLIT.jpg

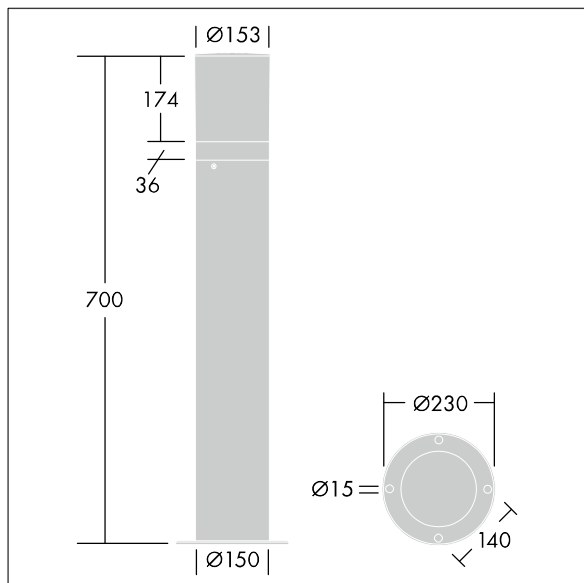

TLG\_DCOB\_M\_BOLN.wmf

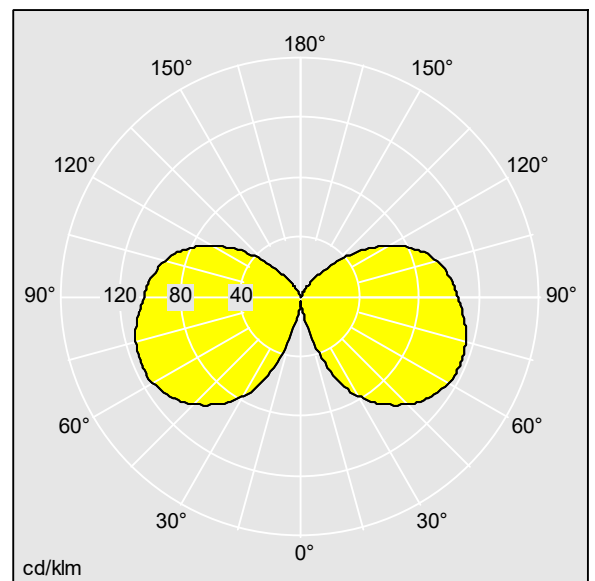

TLLA\_DCOLD3\_DC.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 507 lm  
Luminaire efficacy\*: 36 lm/W  
Correlated colour temperature\*: 3000 Kelvin

Rated useful life (B10)\*:  
L80 50000 h at 25 °C  
Ballast: 1x EL2  
Luminaire input power\*: 14 W Power factor = 0.97  
Dimming: FO  
LOR: 1,00 ULOR: 0,38 DLOR: 0,62

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting