



EN 60598-1 230V / 50Hz IP 44 RoHS 60W / 70W / 75W / 100W / 150W

Domeniul de utilizare: Iluminatul ornamental de exterior

Application: Outdoor decorative lighting

Descriere:

Description:

Dispensor: PC opal (GLOBOLUX) sau PMMA fumuriu, rezistent la șocuri, cu fixare prin sistem baionet

Diffuser: Opal PC (GLOBOLUX) or PMMA smoky, shock resistant, bayonet fixing system

Flanșă de fixare: PC

Fixing flange: PC

Braț aplică: Din PC - se livrează doar la cerere

Console: Black PC - supplied only on request

Stâlp: Diametru de 60mm (adâncimea de inserție - 40mm)

Pole: Diameter 60mm (insertion depth - 40mm)

Sursa: Incandescentă, lampă halogen eco-clasică, lampă fluorescent compactă



Source: Incandescent, eco-classic halogen lamp, compact fluorescent lamp

Dulie: E27

Socket: E 27

Standard: SR EN 60598-1

Standard: SR EN 60598-1

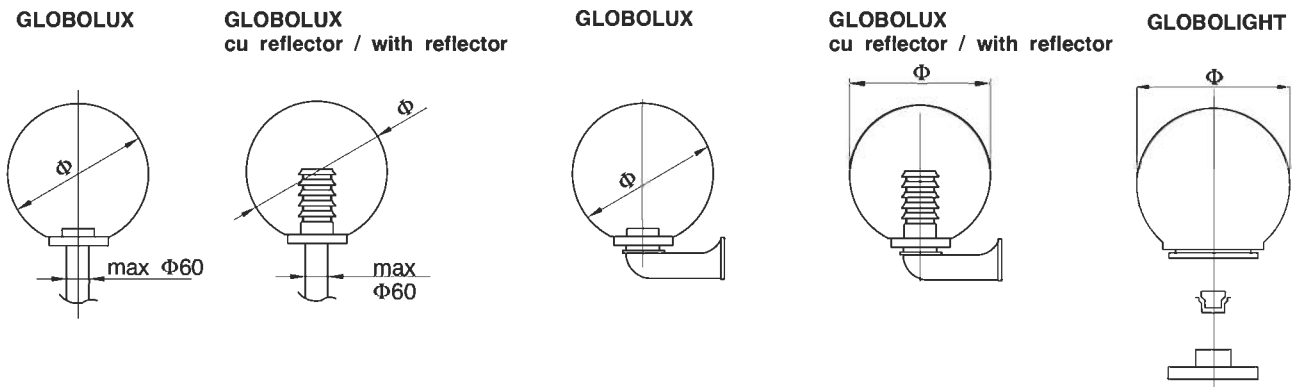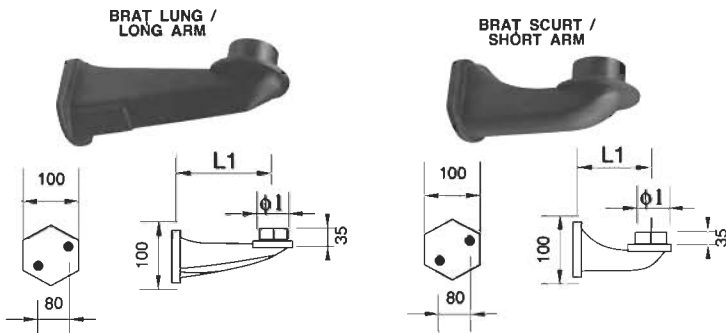

Tip/Type	Cod produs/ Product code	Dimensiuni/ Dimensions [mm]	Dispensor/ Diffuser	Masa/ Weight [kg]	Lampa/ Lamp
		φ			
GLOBOLIGHT	75W	77700417	250	fumuriu / smoky	0.70
	100W	77703138	300	fumuriu / smoky	1.05
GLOBOLUX	60W	77700459	200	fumuriu / smoky	0.60
	60W	77700454	200	opal / opal	0.60
	75W	77700460	250	fumuriu / smoky	0.70
	75W	77700455	250	opal / opal	0.70
	100W	77700461	300	fumuriu / smoky	1.05
	100W	77700456	300	opal / opal	1.05
	100W	77700911	400	fumuriu / smoky	2.00
	100W	77700457	400	opal / opal	2.00
	150W	77700462	500	fumuriu / smoky	2.08
	150W	77700458	500	opal / opal	2.08

Accesorii/accesories

Tip/Type	Cod produs/ Product code	Dimensiuni/ Dimensions [mm]	
		φ1	L1
Braț scurt / Short arm	99900053	60	158
Braț lung / long arm	99900054	60	215
Reflector / Reflector	03204476		