


ONTEC S M2 302 M ST

TM-OS.M2STM360W

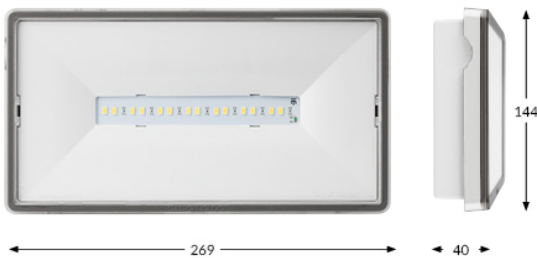


PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP65
IK	IK08
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	4.7 W
Active power	6.5 W
Insulation class	2
Luminous flux	241 lm
Battery	LiFePO4/C 6.4V 1.5Ah
Dimming mode	no



PHOTOMETRY [m]

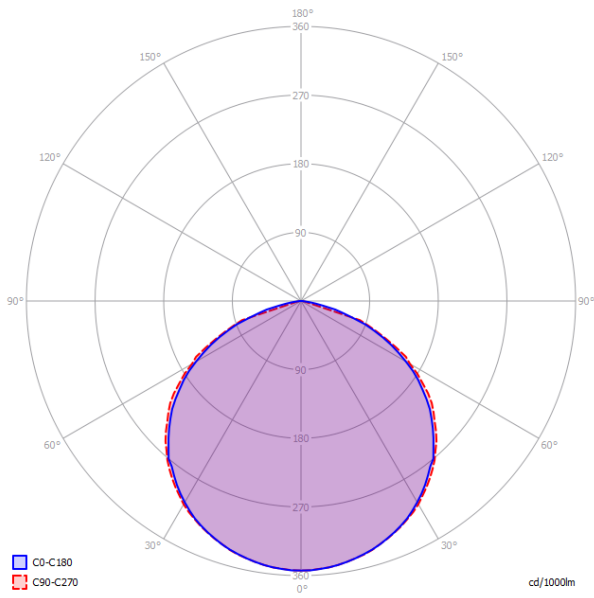

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,6
3,8
4,2
4,6
4,7
4,6
4,6
4,3
4,0

Distance fitting - fitting

9,5
10,4
11,8
13,0
13,9
14,8
15,3
15,8
16,0

