


Safety luminaire

LED emergency luminaire for wall-mounted escape route lighting with min. 1 lux compliant to EN 1838; Room height 2.2 to 8 m; 2 high power LEDs, neutral white 4,000 K; lens made of polycarbonate; optimum thermal management via heat sink; wall surface-mounted luminaire; Screw mounting of the gear tray and IP65 cover; Luminaire housing made of diecast aluminium, powder-coated; housing colour white (close to RAL9016); White fibre-glass reinforced PC cover with transparent PC light outlet; Luminaire with local battery supply for 1 h emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained mode: +5 °C to +30 °C, non-maintained mode: +5 °C to +35 °C; power supply: 220-240 V AC (+/- 10 %), 50-60 Hz; Luminaire input power: 4.7 W (with battery fast-charging in maintained mode), typical connected load (without battery charging): 3.5 W in maintained mode / 1.1 W in non-maintained mode; Non-maintained and maintained mode settable via jumper and NFC interface; IP65; SC1; Luminaire wired with halogen-free leads. Supply line not halogen-free, ballproof; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Dimensions: 200 x 145 x 64 mm; weight: 0.95 kg; Luminaire with D symbol (for use in environments in which the accumulation of conductive dust on the luminaire can be expected) Robust, integrated battery with 3-year warranty. Valid according to terms of the manufacturer's warranty, available at https://www.zumtobel.com/media/downloads/Garantiebedingungen_EN.pdf; Battery warranty invalid if installation takes place three (3) months after delivery EXW (Incoterms 2010)




ZS_RES_F_PRO_MSW_IP65_ExD_ESCW_WH.jpg

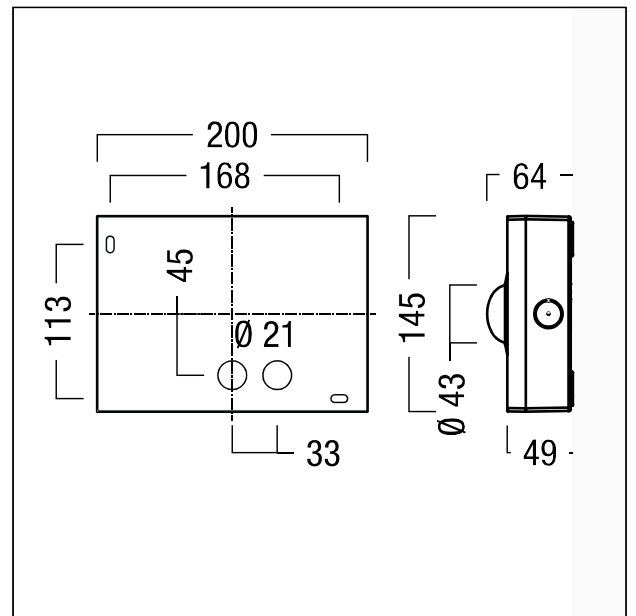

ZS_RES_M_PRO_MSW_IP65.wmf

Light Distribution

STD - standard

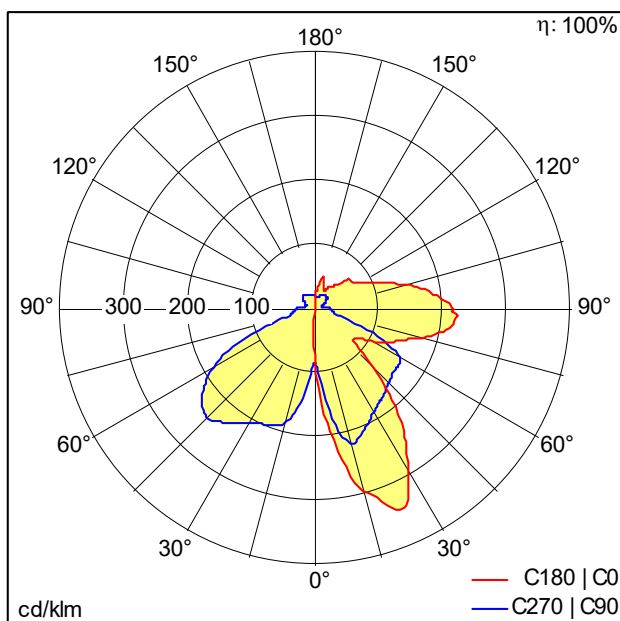

D43821_RESC_PRO_MSW_ESCW_E1D_WH_IP65.idt

Please also consult the additional information on the next page

- Light Source: LED
- Luminaire luminous flux*: 238 lm
- Total emergency luminous flux: 238 lm
- Luminaire efficacy*: 51 lm/W
- Colour Rendering Index min.: 70
- Ballast: 1 x 89800524 EM powerLED NTx 102 DIM 5W ZUM
- Chromaticity tolerance (initial MacAdam): 5
- Rated median useful life*: L95 100000 h at 25 °C
- Luminaire input power*: 4.7 W Power factor = 0.7
- Standby Power*: 1.2 W
- Maintenance category CIE 97: D - Enclosed IP2X

RESCLITE PRO MSW surface-mounted wall IP65



ZUMTOBEL

RESCLITE PRO MSW ESCW E1D WH IP65

42185784

Safety luminaire

This product contains a light source of energy efficiency class D.