

Voyager E LED

96241057 VOYAGER E LED BULKHEAD E3M

LED 2W LED_200	EN 60598-2-22	IP 65			850°C	T _a 0 +25	
-----------------------	---------------	-------	---	---	-------	-------------------------	--

Voyager E LED

Economical self-contained surface mounted 3 hour maintained LED emergency bulkhead. IP65 rated luminaire. Body: white polycarbonate. Diffuser: opal polycarbonate. Self-adhesive legend kit included for escape route signage applications.


Dimensions: 350 x 100 x 80 mm

Total power: 5.6 W


Weight: 0.78 kg



TLG_VOEL_F_PDB.jpg

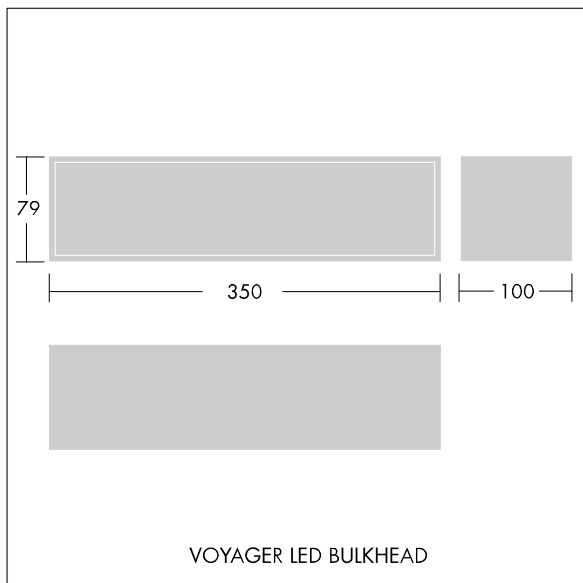

TLG_VOYR_M_LED2.wmf

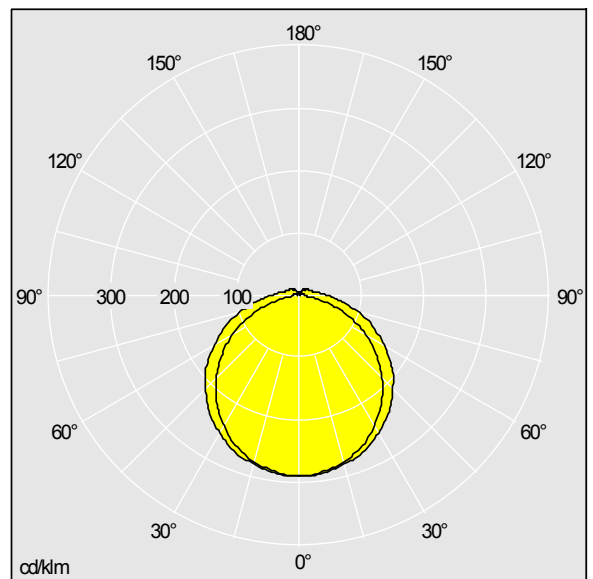

TLG_SP_0040441.ltd

Lamp position: STD - standard
Lamps: 1 x LED_200 / 2.4W
Total luminous flux: 200 lm
Total emergency luminous flux: 105 lm
Luminaire efficacy: 36 lm/W
Ballast: HF ELD
Connected Load: 5.6 W $\Lambda = 0.7$
LOR: 1,00 ULOR: 0,09 DLOR: 0,91