


## Escape sign luminaire

LED Escape sign luminaire, Luminaire for central emergency light supply, for single monitoring of the luminaire via Powerline in connection with the eBox System, settable emergency light level; ; housing made of polycarbonate white (RAL 9016), injection moulded; addressing also alternatively possible visually or via EZ-addressing; luminaire easy to install; zero maintenance thanks to LED technology; uniform backlighting of pictogram; luminance > 500 cd/m<sup>2</sup> in the white region; Luminaire input power: 4.7 W; protection rating: IP42, class of protection: SC2; Impact strength: IK05; non-maintained and maintained mode possible, Maintained mode: -20°C to +40°C, non-maintained mode: -20°C to +45°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; dimensions of luminaire including escape sign: 232 x 46 x 176 mm; weight: 0.42 kg; Luminaire wired with halogen-free leads; max. line length from emergency power source to last luminaire: 300 m; Luminaire with D symbol (for use in environments in which no unusual accumulation of dust is expected); please order escape sign separately;



ZS\_ONL\_F\_CRO\_110\_AB\_Nx.jpg

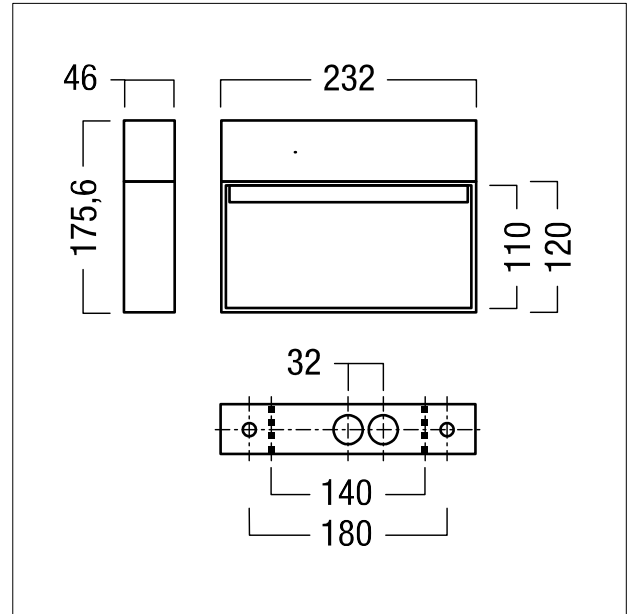

ZS\_ONL\_M\_CROS\_110\_AB\_LED.wmf

## Light Distribution

STD - standard

- Light Source: LED
- Luminaire luminous flux\*: 62 lm
- Luminaire efficacy\*: 13 lm/W
- Ballast: 1 x 89800573 DRV EM TR CPS P NO PLC 5W<sub>2</sub>
- Rated median useful life\*: L90 50000h at 25°C
- Luminaire input power\*: 4.7 W Power factor = 0.7
- Standby Power\*: 1.95 W
- Dimming: PLC dimmable to 10%

All values marked with an \* are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.