

## battery set


## Features of the ONLITE central eBox ACCU SET

- OGiV high-rate grid plates (lead/calcium)
- Equivalent to the EUROBAT high performance class
- 10 year useful service life @ 20°C ambient temperature
- ABS housing and cap
- Poles with MP6.3 flat spade connection
- Extremely low gas emission
- Low self-discharge
- No transportation restrictions
- 100% recyclable
- Maintenance-free over the entire useful service life
- Rated voltage 18x12 V / 216 V DC
- Complies with DIN EN 60896
- Ventilation according to EN IEC 62485-2:2018

The battery set must not be stored for more than two months after delivery without battery charging. The battery set must be connected to the system after two months at the latest. In case of failure to comply with these instructions, any liability or warranty claims will be rejected.



ZS\_ONL\_F\_eBox\_Akku\_Set.jpg

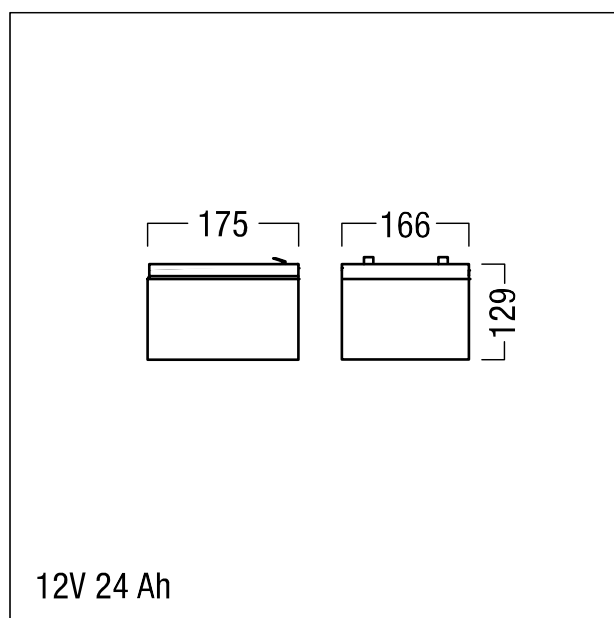

ZS\_ONL\_M\_eBox\_Akku\_12V24Ah.wmf