



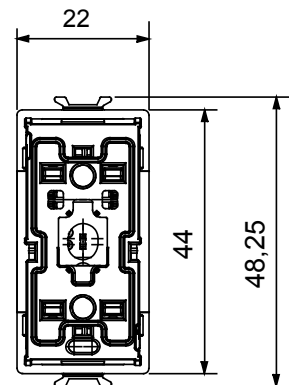

Auxiliary axial controls, to be used in conjunction with EVO commands, connected commands or individually to control small loads.

Output contacts	1 NO 1 A (AC1) 240 V ac	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	Standard	2014/35/EU, 2011/65/EU + 2015/863, EN 60669-1, EN IEC 63000
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 93%
Wiring terminals	With screw	Terminal tightening capacity stranded cables (mm ²)	Max. 1,5
Terminal tightening capacity solid cables (mm ²)	Max. 1,5	Category	1-channel auxiliary axial command
IP degree	IP20 (with button key)	LED colour	Blue
Local control	Via front push button (to complete with button key)	Material	Technopolymer

DIMENSIONAL

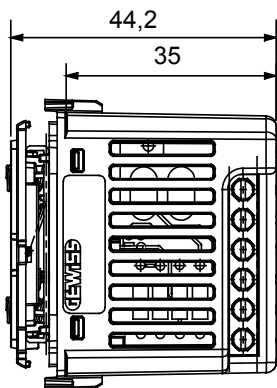

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS

