
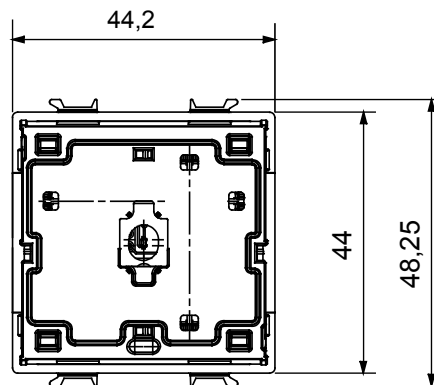


Auxiliary axial controls, to be used in conjunction with EVO commands, connected commands or individually to control small loads.

Output contacts	1 NO 1 A (AC1) 240 V ac	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	2	Standard	2014/35/EU, 2011/65/EU + 2015/863, EN 60669-1, EN IEC 63000
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 93%
Wiring terminals	With screw	Terminal tightening capacity stranded cables (mm <sup>2</sup> )	Max. 1,5
Terminal tightening capacity solid cables (mm <sup>2</sup> )	Max. 1,5	Category	1-channel auxiliary axial command
IP degree	IP20 (with button key)	LED colour	Blue
Local control	Via front push button (to complete with button key)	Material	Technopolymer

### DIMENSIONAL

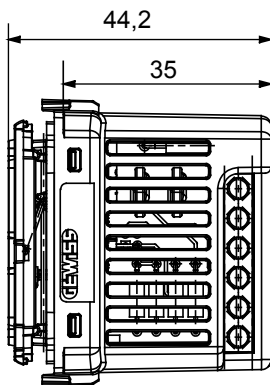

### TECHNICAL SYMBOLOGY

## IP

IP20 (with button key)

### STANDARDS/APPROVALS

