


# Accent Track D65

Configuration code: TCAT65 27S/840 DIA HVWB T102 WH401

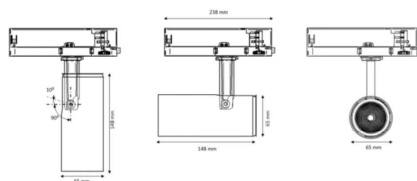

Luminaire Housing Color	WH401 - Satin White (9003)
Luminaire Accent ring Color	WH401 - Satin White
Luminaire Housing Texture	T102 - Layered
Luminous flux (lumen)	2903
Luminous flux tolerance (Initial performance, IEC compliant)	+/- 10%
Power consumption (W)	23.4
Power consumption tolerance (Initial performance, IEC compliant)	+/- 10%
Luminous Efficacy (lm/W)	124
Correlated Color Temperature (K)	4000K
Color Rendering Index (CRI)	>80
SDCM	< 2
Optic Type	HVWB (High efficacy Very wide beam 55°)
Luminaire Light Beam Spread	Very Wide Beam 55°
Optic Material	High reflective Aluminium Reflector
Driver	DIA - For DALI Interact wired (DIA) system without sensor or DALI system, through wiring
Optical Cover	None
Housing	3D printed uv-stabilized polycarbonate plastic with decorative layered texture
Glare Accessories	None
Weight (kg)	0.44 KG (Including driver)
Rotation	340°
Tilt	90°
IP rating	IP20
IK rating	IK02
Ambient temperature range (°C)	+10° to +35° C
Certifications	CE, RoHCS, CB
Glow wire test	650°
Lumen maintenance (EN-IEC 62722-2-1) at median useful life	100.000hrs. L80 @25°C Ta
Control gear failure rate at median useful life	< 10% at 50,000 hrs for Tambient 25 °C
Warranty	5 years
Power Factor	Min 0.9
Region	EU
Configuration code (Internal use only)	TCAT65  TCAT65 27S 840 DIA HVWB N WH401 WH401 T102 N

Open your creation