




# LineaLed Wallwasher 34W - EL 3000K

Carlotta de Bevilacqua



IP65/67  

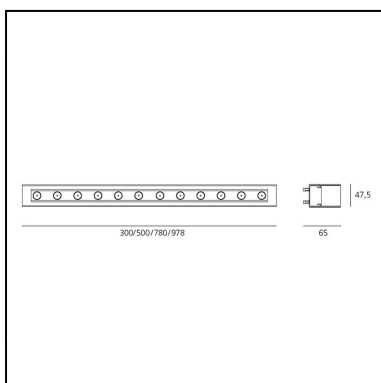

## LUMINAIRE

- Power Supply: **Elettronic**
- Watt: **34W**
- Voltage: **24 Vdc**
- Delivered lumen output: **2919lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **85.85lm/W**
- CRI: **80**

## Notes

### Flood optic

Wide luminous flow suitable for lighting large areas. (40° optic)

## DESCRIPTION

Walk-over and drive-over recessed floor installation. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture. 24Vdc remote ballast. Connect a maximum number of 2 fixtures in a continuous line. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

## FEATURES

- Product Code: **NL17323ELK0**
- Colour: **Silver gray**
- Installation: **Recessed**
- Material: **Aluminium, transparent tempered glass.**
- Series: **Architectural Outdoor**
- Area contract: **Outdoor**
- design by: **Carlotta de Bevilacqua**

## DIMENSIONS

- Length: **978 mm**
- Width: **48 mm**
- Height: **90 mm**
- Weight: **kg 2.77**
- Impact Resistance: **IK07**

## SOURCES INCLUDED

- Category: **Led**
- Number: **4**
- Watt: **8,5W**
- Delivered lumen output: **1776lm**
- Color temperature (K): **3000K**
- Voltage: **24Vdc**

**Accessories**

NO  
IMAGE  
AVAILABLE

Housing end cap (pair) - 46,5 x 62,5 x 1,5mm  
NL76750

NO  
IMAGE  
AVAILABLE

Female power connector for discontinuos connection  
NL19023

NO  
IMAGE  
AVAILABLE

Male power connector for discontinuos  
connection NL19021

NO  
IMAGE  
AVAILABLE

Housing L=982mm NL76700

NO  
IMAGE  
AVAILABLE

Cassaforma L=300mm NL76740

NO  
IMAGE  
AVAILABLE

Cassaforma L=500mm NL76730

NO  
IMAGE  
AVAILABLE

Cassaforma L=780mm NL76710

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W 24Vdc IP67 NL62040

NO  
IMAGE  
AVAILABLE

CONNETTORE ALIMENTAZIONE + TAPPO NL19052

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W 24Vdc IP67 NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W 24Vdc IP67 NL62880



LINEALED STAFFA GIUNZIONE C/CASSA NL75810