


Datasheet

PROLED PUMA CCU

PROLED®

Article number: L52335202G
Article name: PROLED PUMA CCU
Article description: PROLED SWITCHING POWER SUPPLY PUMA CCU 350-020
GTIN: 4251158408477

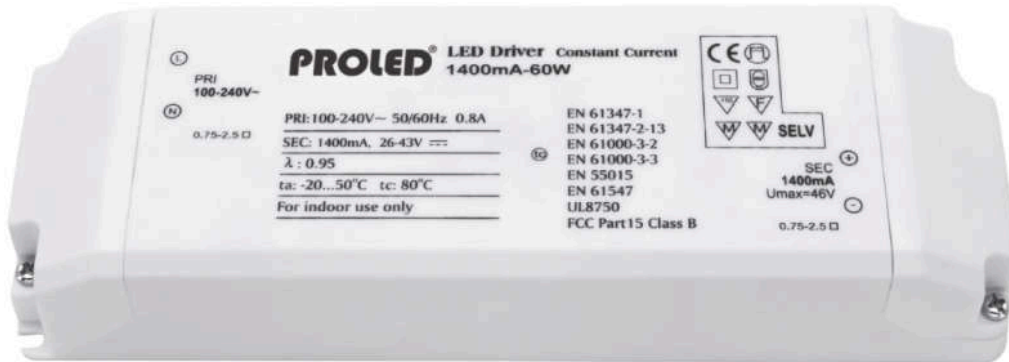

picture similar

Electrical properties:

Input:	
Voltage supply:	220 - 240 VAC ; 50 - 60 Hz ; 0.14 A
Inrush current:	< 15 A ; < 300 μs
Efficacy:	85 %
Power factor:	0,8
Output:	
Output:	350 mA CC; 2 - 58 VDC; 20 W
Output adjustable:	—

Technical properties:

Primary connection:	Screw terminal; 0.75 - 2.5 mm ²
Secondary connection:	Screw terminal; 0.75 - 2.5 mm ²
Control:	no
PWM dimmer:	—
Fan:	without fan

Date: 14.9.2024

Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

Protection properties:

Protections:	Short cut, Over power, Over temperature, Open circuit
Electrical safety class:	II
IP classification:	IP20
MM sign:	✓

Housing and size:

Size:	113 x 44 x 28 mm (l x w x h)
Housing colour:	white
Housing material:	Plastics
Product weight:	0,100 kg

Mounting instructions:

For outdoor use:	–
Mounting place:	Stand mounting, Wall-ceiling mounting
Mounting type:	screwable
Ambient temperature:	-20 °C to 50 °C
Max. case temperature:	80 °C

Flags:

